

Miller 95N Linemen’s Belt

Description

Miller Linemen’s belts combine superior design characteristics and handmade craftsmanship to create a product of the highest quality. The 95N is a full-floating belt that allows for lateral movement of the D-saddle with D-rings during use. As a lineman changes position on a pole, the D-rings easily adjust to the movement. As a result, the pole strap rubs against the pole less frequently and receives less wear. Any load or pull does not bind tools to the tool loops. Features side positioning D-rings, leather tool loops, accessory snap, support belt rings, tape thong and accessory ring.




Materials

- Webbing:** 1 3/4 -in Polyester
- Back Pad:** 5-in Leather
- Thread:** Polyester
- D-ring:** Clear Chromate Finished Carbon Steel
- Hardware:** Steel
- Grommets:** Brass
- Label:** Metal Tag

*All hardware meets ASTM fifty-hour salt spray test requirements.

Technical

- Max. Working Load:** 310 lbs (kg)
- Webbing Min. Tensile:** 5,000 lbs (22kN)
- D-ring Min. Tensile:** 5,000 lbs (22kN)
- Buckle Min. Tensile:** 4,000 lbs (18kN)

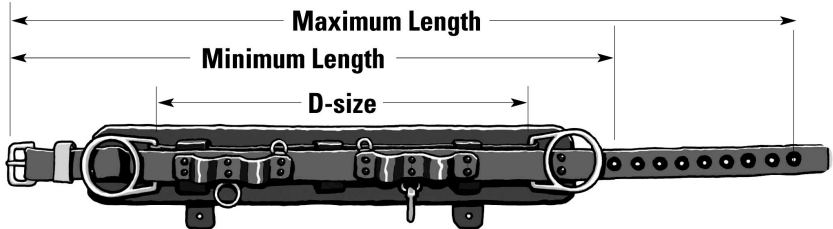

Certification

OSHA 1926.159, 1926.959, 1926.502 (d), ANSI A10.32 and CSA Z259.3

Sizing Chart for Linemen’s Belts

D-Size	D18	D19	D20	D21	D22	D23	D24	D25	D26	D27	D28	D29	D30
Min.	32" (800mm)	33" (825mm)	34" (850mm)	35" (875mm)	36" (900mm)	38" (950mm)	40" (1000mm)	42" (1050mm)	44" (1100mm)	46" (1150mm)	47" (1175mm)	48" (1200mm)	49" (1225mm)
Max.	42" (1050mm)	43" (1075mm)	44" (1100mm)	45" (1125mm)	46" (1150mm)	48" (1200mm)	50" (1250mm)	52" (1300mm)	54" (1350mm)	56" (1400mm)	57" (1425mm)	58" (1450mm)	59" (1475mm)



Toll Free 800.873.5242 • Phone 814.432.2118 • Fax 800.892.4078 • www.millerfallprotection.com

WARNING! THIS DOCUMENT PROVIDES AN OVERVIEW OF FALL PROTECTION PRODUCTS AVAILABLE FROM MILLER FALL PROTECTION AND CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE DATA. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. MILLER FALL PROTECTION RECOMMENDS ALL USERS OF FALL PROTECTION EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THE PRODUCTS BE THOROUGHLY READ AND UNDERSTOOD PRIOR TO EACH USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.