

New!

Miller® Specialty Anchorage Connectors




**Cable Anchorage Connector
Model #8187V**

Cable Anchorage Connector Model #8187V

The new Miller® Cable Anchorage Connector is a convenient means of creating a quick and easy secure point of attachment. Simply wrap the cable around an I-beam or other structure capable of withstanding 5,000 lbs. (22kN) and connect the captive eye carabiner to the thimble at the opposite end of the cable. Then attach a lanyard, self-retracting lifeline or other connecting device to the O-ring.

- Constructed of 1/4-inch (6mm) vinyl-coated galvanized wire rope
- Forged steel, auto-lock, captive eye carabiner with 1-inch (25mm) gate opening
- Forged steel 3-inch (76mm) O-ring
- Standard length is 6 feet (1.8m); additional lengths available

Model No.	Description
8186V	Cable Anchorage Connector w/locking snap hook
8187V	Cable Anchorage Connector w/auto-lock captive eye carabiner

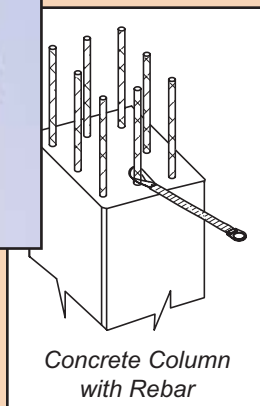

**Disposable Concrete
Anchor Strap
Model #8185C**

Disposable Concrete Anchor Strap Model #8185C

The Miller® Disposable Concrete Anchor Strap is uniquely designed to provide a temporary anchorage on concrete forms. The twist loop on the end of the anchor strap slips over rebar and concrete is then poured on top of the loop and adjoining protective nylon sleeve to anchor the strap securely in place. **Once the concrete sets, a safe anchorage exists.** A worker may then attach a lanyard, self-retracting lifeline or other connecting device to the anchor strap. When the anchorage is no longer needed, simply cut the protruding strap and discard.

- Constructed of 1-3/4 inch (44mm) wide, abrasion-resistant nylon webbing with a 7,000 lb. (30kN) tensile strength
- Protective outer nylon sleeve
- Forged steel D-ring capable of withstanding 5,000 lbs. (22kN)
- Standard lengths of 2 feet (.6m) and 4 feet (1.2m); additional lengths available

Model No.	Description
8185C	Concrete Anchor Strap w/D-ring
8185CX	Concrete Anchor Strap w/web loop with inner wear pad for carabiner attachment

For more information or to place an order, please contact your Miller® distributor:

LSAC/0701/15M/SX

MILLER

TOLL FREE 800/873-5242 FAX 800/892-4078
Phone 814/432-2118 Fax 814/432-2415
www.cdalloz.com



Franklin, PA - ISO 9001
Trenton, ON - ISO 9002